



KES ENERGY

Piazza delle Fornaci, 4 – 36030 Villaverla- Italy

www.kes-energy.it info@kes-energy.it

tel. +39 0445 350756

KES ENERGY DIESEL GENSETS BY ENGINE MANUFACTURER

POWER		KES ENERGY	ENGINE						SWITCH	DIMENSIONS			
STANDBY KVA	PRIME KVA	MODEL	MAKE	MODEL	GROSS POWER KWM	CYLINDERS NO.	DISPLACEMENT IT.	FUEL CONSUM.*	AMPS	OPEN CM **	OPEN KG	ENCLOSED CM**	ENCLOSED KG
10	9	KEPSW10	PERKINS	403D-11G	9.5	3	1.13	3.0	16	140x80x120	490	175x90x140	690
15	13	KEPSW15	PERKINS	403D-15G	13.5	3	1.5	3.7	20	140x80x120	535	175x90x140	775
17	15	KEPSW17	PERKINS	403A-15G2	15	3	1.5	5	20	140x80x120	560	175x90x140	770
22	20	KEPSW22	PERKINS	404D-22G	20.6	4	2.2	5.3	32	150x80x125	610	175x90x140	950
33	30	KEPSW33	PERKINS	1103A-33G	31	3	3.3	8.6	50	170x80x130	845	190x90x150	1060
50	45	KEPSW50	PERKINS	1103A-33TG1	46.5	3	3.3	10.8	80	200x100x145	955	220x110x165	1255
72	65	KEPSW72	PERKINS	1104A-44TG1	65.6	4	4.4	14.8	100	200x100x145	1160	220x110x165	1365
88	80	KEPSW88	PERKINS	1104A-44TG2	80.7	4	4.4	18.7	125	200x100x145	1195	220x110x165	1490
111	100	KEPSW111	PERKINS	1104C-44TAG2	103	4	4.4	26.9	160	200x100x145	1240	290x110x150	1640
150	135	KEPSW150	PERKINS	1106A-70TG1	135.8	6	7	30.2	250	245x110x170	1550	290x110x150	1940
165	150	KEPSW165	PERKINS	1106A-70TAG2	153.6	6	7	36.1	250	270x120x165	1690	350x125x185	2285
200	180	KEPSW200	PERKINS	1106A-70TAG3	179.8	6	7	41.6	400	270x120x165	1790	350x125x185	2390
220	200	KEPSW220	PERKINS	1106A-70TAG4	196.3	6	7	45.8	400	270x120x165	1820	350x125x185	2410
225	200	KEPSW225	PERKINS	1206A-E70TTAG1	204.2	6	7	45.8	400	270x120x180	1895	390x145x185	2700
250	225	KEPSW250	PERKINS	1206A-E70TTAG2	226.1	6	7	51	400	270x120x180	1935	390x145x185	2730
275	250	KEPSW275	PERKINS	1206A-E70TTAG3	248.6	6	7	56.9	400	270x120x180	1950	390x145x185	2745
300	275	KEPSW300	PERKINS	1506A-E88TAG4	267	6	8.8	60	630	300x135x180	2705	390x145x185	3530
335	300	KEPSW335	PERKINS	1506A-E88TAG5	293	6	8.8	65	630	300x135x180	2830	390x145x185	3650
400	350	KEPSW400	PERKINS	2206C-E13TAG2	368	6	12.5	75	630	310x135x200	3250	440x145x225	4250
450	400	KEPSW450	PERKINS	2206C-E13TAG3	413	6	12.5	85	630	310x135x200	3325	440x145x225	4330
500	455	KEPSW500	PERKINS	2506C-E15TAG1	451	6	15.2	99	800	355x145x215	3785	440x145x225	4790
550	500	KEPSW550	PERKINS	2506C-E15TAG2	495	6	15.2	106	800	355x145x215	3835	440x145x225	4835
660	600	KEPSW660	PERKINS	2806A-E18TAG1A	593	6	18.1	123	1000	355x155x215	4445	500x165x237	5645
715	650	KEPSW715	PERKINS	2806A-E18TAG2	593	6	18.1	132	1000	355x155x215	4575	500x165x237	5780
825	750	KEPSW825	PERKINS	4006-23TAG2A	721	6	22.92	157	1250	385x175x220	5990	570x220x265	7225
850	770	KEPSW850	PERKINS	2806A-E18TAG5	743	6	18.1	162	1250	385x175x220	5100	570x220x265	6420
900	800	KEPSW900	PERKINS	4006-23TAG3A	786	6	22.92	172	1600	385x175x220	6105	570x220x265	7400
1002	911	KEPSW1002	PERKINS	4008TAG1A	882	8	30.56	195	1600	480x190x220	7155	640x235x280	9355
1125	1022	KEPSW1125	PERKINS	4008TAG2A	985	8	30.56	215	1600	480x190x220	7295	640x235x280	9500
1250	1125	KEPSW1250	PERKINS	4008-30TAG3	1055	8	30.56	244	2000	490x210x220	9190	640x235x280	11395
1385	1250	KEPSW1385	PERKINS	4012-46TWG2A	1224	12	45.84	259	2000	485x180x235	9680	800x240x310	12090
1500	1364	KEPSW1500	PERKINS	4012-46TWG3A	1321	12	45.84	283	2500	510x190x245	10305	800x240x310	12765
1656	1505	KEPSW1656	PERKINS	4012-46TAG2A	1459	12	45.84	310	2500	510x190x245	11320	800x240x310	13420
1880	1710	KEPSW1880	PERKINS	4012-46TAG3A	1643	12	45.84	370	3200	525x220x270	11935	800x240x310	14345
2000	1850	KEPSW2000	PERKINS	4016-61TRG1	1774	16	61.1	384	3200	565x225x265	13515	1219x244x289	18015
2028	1844	KEPSW2028	PERKINS	4016TAG1A	1741	16	61.1	391	3200	555x235x295	14665	1219x244x289	19165
2250	2000	KEPSW2250	PERKINS	4016-61TRG2	1985	16	61.1	405	3200	605x220x255	13805	1219x244x289	18305
2263	2058	KEPSW2263	PERKINS	4016TAG2A	1937	16	61.1	447	3200	555x235x295	15225	1219x244x289	19725
2500	2250	KEPSW2500	PERKINS	4016-61TRG3	2183	16	61.1	470	4000	610x230x300	14255	1219x244x289	18755

All power ratings listed at 50 Hz/1500 rpm/400Vac/3 Phase. Dimensions not to be used for installation purposes

* Consumption listed as litres per hour in standby operation under standard conditions

**Dimensions listed in Length x Width x Height format. Enclosed dimensions are listed as standard and can modified based on customers requirements (e.g. extra soundproofing, etc.)

**Head
Office**

Kes Energy
Piazza delle Fornaci, 4
36030 Villaverla
Italy

info@kes-energy.it

tel. +39 0445 350756

fax +39 0445 350756

**Dubai
Office**

Kes Energy LLC
Sheikh Zayed Road, Business Bay
Fifty One @Business Bay, Office #0607
Dubai
United Arab Emirates

infodubai@kes-energy.it

tel. +971 4 368 8669

fax +971 4 368 8679

Sales

sales@kes-energy.it

Service

technical@kes-energy.it


Export

export@kes-energy.it



KES ENERGY

YOUR POWER PARTNER

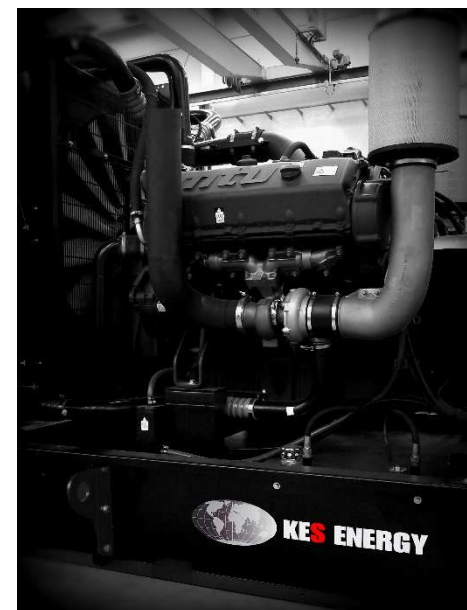

www.kes-energy.it

Copyright© 2020 by Kes Energy

All rights reserved. Reproduction or dissemination is strictly prohibited without prior written consent from Kes Energy.